

Technical argumentation
Argumentation technique


VS Range

Gamme VS

1SBC146011C1701 Technical Presentation VS range 1.0 - Version 1.0

100% electronic
voltage sensors

Capteurs de tension
100% électronique

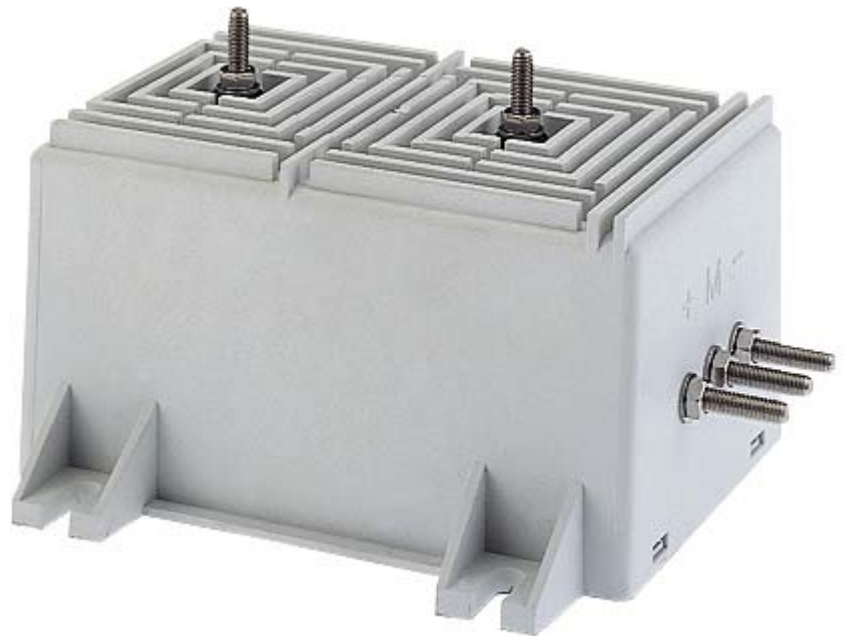

ABB

SUMMARY

1	The customers' technical needs	4
2	The aimed applications	5
3	The technology	5
4	The range	7
5	The main characteristics	9
6	The options and accessories	10
7	The electrical connections	11
8	The advantages	12
9	The used standards	13
10	The technical documentation	16

This document cannot be duplicated in any manner, without prior authorisation from ABB Entelec



SOMMAIRE

1	Les besoins techniques clients	4
2	Les applications visées	5
3	La technologie	5
4	La gamme	7
5	Les principales caractéristiques	9
6	Les options et accessoires	10
7	Les connexions électriques	11
8	Les avantages	12
9	Les normes appliquées	13
10	La documentation technique	16

Ce document ne peut-être dupliqué sous quelque forme, que ce soit, sans autorisation préalable de ABB Entelec



Current and voltage sensors		VS range Technical Presentation	
© ABB Entelec - 1 - VS Presentation 1.0 Sep- 2005			

Technical presentation summary

- 1 The customer's needs
- 2 The aimed applications
- 3 The technology
- 4 The range
- 5 The main characteristics
- 6 The options and accessories
- 7 The electrical connections
- 8 The advantages
- 9 The used standards
- 10 The technical documentation


© ABB Entelec - 2 - VS Presentation 1.0
Sep-2005



1 The customers' needs



- Price



- High quality



- High performances



- Reliability



- Compactness



- Latest standards



- Reliable supplier

© ABB Entelec - 3 - VS Presentation 1.0
Sep-2005



2 The aimed applications


- Traction applications
 - Power converters
 - Catenaries d.c. voltage
 - Motor phase voltages, etc...
 - Battery voltages
 - Auxiliary voltages

© ABB Entelec - 4 - VS Presentation 1.0
Sep-2005



3 The technology

- Functioning principle

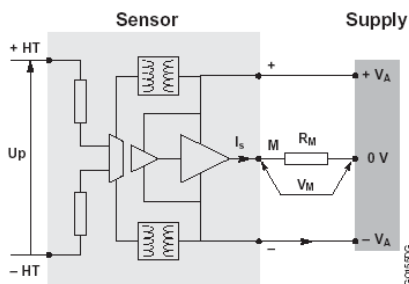

In contrast to closed loop Hall effect technology, this fully electronic technology does not use magnetic circuits or Hall probes. This allows the measurement of direct or alternating voltages with electrical insulation between the primary and secondary circuits.

The primary voltage to be measured is applied directly to the sensor terminals: HT+ (positive high voltage) and HT- (negative high voltage or earth). This voltage is passed through an insulating amplifier and is then converted into a secondary output current I_s . This secondary current I_s is electrically insulated from the primary voltage to which it is exactly proportional. The voltage sensor measures instantaneous values.

In the same way as for current sensors, this secondary current I_s can be then passed through a measuring resistance R_M . The measuring voltage V_M at the terminals of this measuring resistance R_M is therefore also exactly proportional to the primary voltage. The electrical supply to the sensor is also insulated from the primary voltage.

© ABB Entelec - 5 - VS Presentation 1.0
Sep-2005



3 The technology

- Technologies comparison for voltage sensing

	VS	Other
Measuring range	1.5 U _{PN} (continuously)	1.5 U _{PN} (50 sec/hr)
Bandwidth	13 kHz	1 kHz
Response time	< 15µsec	20 to 200µsec
Accuracy (-40 to +85°C)	±1.7% at U _{PN}	±3% to ±5% at U _{PN}
High current influence	Very low	Yes
Partial discharges	High (EN50207)	Low

© ABB Entelec - 6 - VS Presentation 1.0
Sep-2005



3 The technology

- Technologies comparison for voltage sensing

	VS	Other
Calibrated sensors	Low power primary resistors No heat sink Low power primary resistors included (no power to dissipate)	Primary resistors Heat sink Primary resistor included (about 10W to dissipate)
Not calibrated sensors	All the VS sensors are calibrated	1 external primary resistor of about 100 W to 200 W (additional cost and higher power to dissipate)
Overall dimensions	138 x 63 x 64 (size 0) 168 x 134 x 93 (size 1)	152 x 63 x 89 (EM type) 196 x 135 x 105 (TM type)
Weight	450g (size 0) 1500g (size 1)	550g (EM type) 1600g (TM type)

© ABB Entelec - 7 - VS Presentation 1.0
Sep-2005



3 The technology

- Major advantages of the VS technology (electronic technology)
 - Electrical isolation
 - High accuracy
 - Fast response time
 - Excellent immunity to electromagnetic fields
 - Excellent linearity
 - Wide continuous measuring range
 - Low power dissipation (no heating)

© ABB Entelec - 8 - VS Presentation 1.0
Sep-2005



4 The range

- General range presentation:
 - 50V r.m.s. up to 4200V r.m.s.
 - 50V r.m.s. => VS50B
 - 125V r.m.s. => VS125B
 - 250V r.m.s. => VS250B
 - 500V r.m.s. => VS500B
 - 750V r.m.s. => VS750B
 - 1000V r.m.s. => VS1000B
 - 1500V r.m.s. => VS1500B
 - 2000V r.m.s. => VS2000B
 - 3000V r.m.s. => VS3000B
 - 4000V r.m.s. => VS4000B
 - 4200V r.m.s. => VS4200B



© ABB Entelec - 9 - VS Presentation 1.0
Sep-2005



4 The range

■ VS range:


- Technology: 100% electronic
- Measuring range: $\pm 1.5 \times U_{PN}$ (continuously)
- Temperature: -40°C to $+85^{\circ}\text{C}$
- Supply voltage: $\pm 12\text{V} \dots \pm 24\text{V}$
- Bandwidth: 0 to 13kHz
- Global accuracy: $\pm 1.7\%$ (-40°C to $+85^{\circ}\text{C}$)
- Dielectric strength: EN50124-1 (from 3.3kV up to 12kV)
- Options: primary & secondary terminals, output current (size 1)

© ABB Entelec - 10 - VS Presentation 1.0
Sep-2005



4 The range

■ VS range mechanical layout



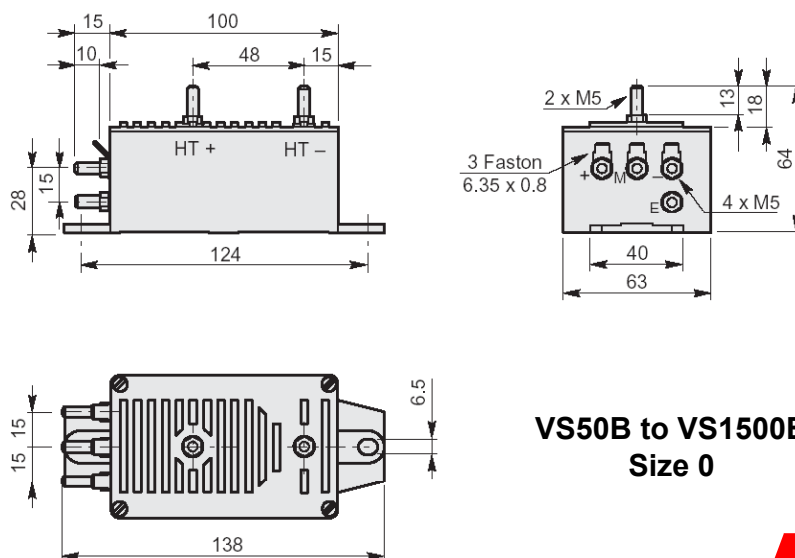


© ABB Entelec - 11 - VS Presentation 1.0
Sep-2005



4 The range

■ VS range mechanical layout

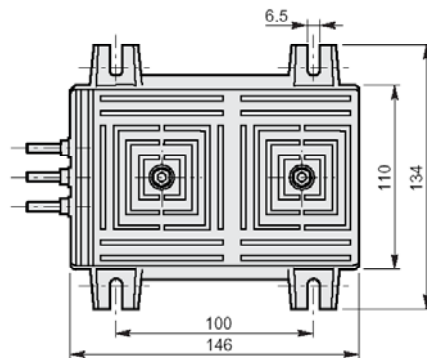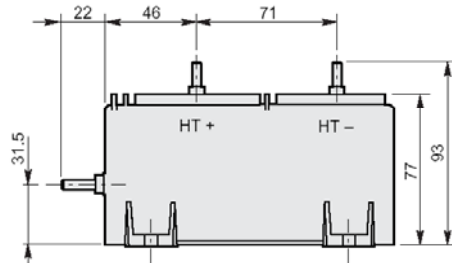

VS2000B to VS4200B
Size 1



© ABB Entelec - 12 - VS Presentation 1.0
Sep-2005

5 The main characteristics

■ VS range main standard characteristics

			VS50B	VS125B	VS250B	VS500B	VS750B
Nominal primary voltage	U_{PN}	V r.m.s.	50	125	250	500	750
Measuring range	$U_{P\text{MAX}}$	@ $\pm 12V \dots \pm 24V \pm 5\%$	± 75	± 187.5	± 375	± 750	± 1125
Secondary current at U_{PN}	I_S	mA	50				
Accuracy at U_{PN}	Err%	@ $+25^\circ\text{C}$	$\leq \pm 0.9$				
Linearity	L_{in}	$0.1U_{PN} \dots 1.5U_{PN}$	≤ 0.3				
Delay time	dt	μs	≤ 10				
dv/dt correctly followed	dv/dt	V/ μs	≤ 0.6	≤ 1.5	≤ 3	≤ 6	≤ 9
Bandwidth	BW	-3dB & $R_M=50\Omega$	≤ 13				
Max. no-load consumption current	I_{ao}	@ $\pm 24V \pm 5\%$	≤ 50				
Dielectric strength Primary/Secondary	$U_{d_p/s}$	50 Hz, 1 min	3.3	3.3	3.3	3.3	4.3
Supply voltage	V_A	$\pm 5\%$	V dc $\pm 12 \dots \pm 24$				
Operating temperature	T^{op}	$^\circ\text{C}$	$-40 \dots +85$				
Storage temperature	T^{st}	$^\circ\text{C}$	$-50 \dots +90$				



© ABB Entelec - 13 - VS Presentation 1.0
Sep-2005

5 The main characteristics

■ VS range main standard characteristics

				VS1000B	VS1500B	VS2000B	VS3000B	VS4000B	VS4200B
Nominal primary voltage	U_{PN}		V r.m.s.	1000	1500	2000	3000	4000	4200
Measuring range	$U_{P\text{MAX}}$	@ ±12V...±24V ±5%	V peak	±1500	±2250	±3000	±4500	±6000	±6000
Secondary current at U_{PN}	I_S		mA	50					
Accuracy at U_{PN}	Err%	@ +25°C	%	≤±0.9					
Linearity	Lin	0.1 U_{PN} ... 1.5 U_{PN}	%	≤0.3					
Delay time	dt		µs	≤10					
dv/dt correctly followed	dv/dt		V/µs	≤12	≤18	≤24	≤36	≤48	≤50
Bandwidth	BW	-3dB & $R_M=50\Omega$	kHz	≤13					
Max. no-load consumption current	I_{ao}	@ ±24V ±5%	mA	≤50					
Dielectric strength Primary/Secondary	$U_{d\text{p/s}}$	50 Hz, 1 min	kV	5.5	6.5	8	12	12	12
Supply voltage	V_A	±5%	V dc	±12 ... ±24					
Operating temperature	T^{op}		°C	-40 ... +85					
Storage temperature	T^{st}		°C	-50 ... +90					

© ABB Entelec - 14 - VS Presentation 1.0
Sep-2005



6 The options and accessories

■ VS range : electrical options

■ Nominal secondary current I_{SN} :

- I_{SN} for (U_{PN})= 20mA
 - I_{SN} for (U_{PN})= 80mA
- } for size1 only ($2000V \leq U_{PN} \leq 4200V$)

■ VS range : terminals options

■ Standard output connections:

3 x M5 studs
3 x 6.35 x 0.8 Faston



© ABB Entelec - 15 - VS Presentation 1.0
Sep-2005



6 The options and accessories

- Optional output connections:

- Shielded cable



- LEMO Connector



- 3 or 4 inserts



- Others on request...




© ABB Entelec - 16 - VS Presentation 1.0
Sep-2005

7 The electrical connections

- VS range: connection diagram


- Bi-directional power supply

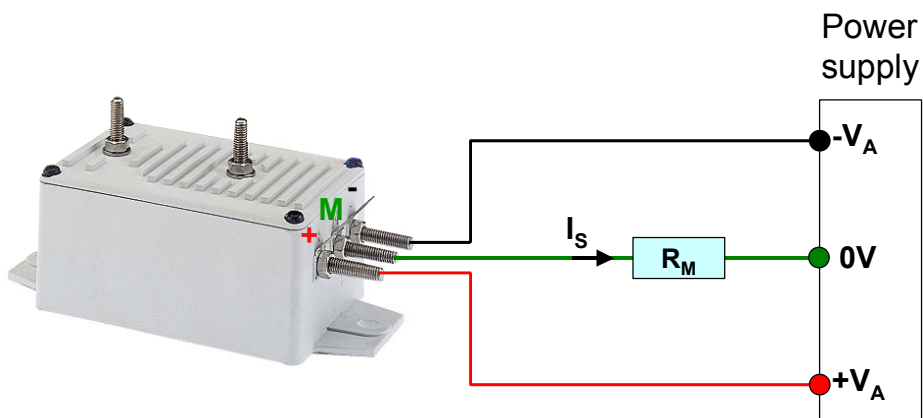


© ABB Entelec - 17 - VS Presentation 1.0
Sep-2005

7 The electrical connections

- Uni-directional power supply

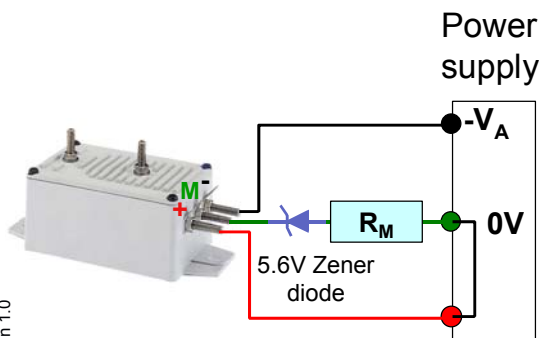

0... $-V_A$

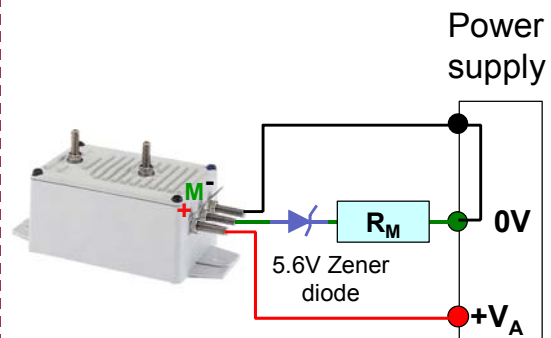

$+V_A$...0



© ABB Entrellec - 18 - VS Presentation 1.0
Sep-2005

8 The advantages

- Construction
 - The first and most compact product since 1997
 - High performance
 - High external magnetic fields rejection
 - High measuring capabilities
 - A traction voltage sensor 100% resin potted
 - Electronic board protected
 - Withstand high vibration constraints
 - High thermal capacities
 - The best compromise: performance/volume/price
 - Recyclable packaging



© ABB Entrellec - 19 - VS Presentation 1.0
Sep-2005

8 The advantages

- Set-up flexibility
 - Accurate customer's needs optimise sensor selection knowing:
 - Max. permanent operating temperature
 - Max. measurable voltage with duration
 - Max. over voltage (not measurable) with duration
 - Max. voltage on burden resistance at $U_{P_{MAX}}$
 - Min. supply voltage
 - Mechanical flexibility due to compact sensor design

© ABB Entelec - 20 - VS Presentation 1.0
Sep-2005



9 The used standards: railways applications

- EN50155
 - Testing (see details in the concerned Type Test Report)
 - Functioning : @ +25°C, @-40°C, @+85°C
 - : response time
 - : dv/dt
 - : bandwidth
 - : overload
 - : magnetic environment
 - : power supply over/under voltage
 - Other climatic tests : salt mist
 - : humid heat cycling
 - : storage

© ABB Entelec - 21 - VS Presentation 1.0
Sep-2005



9 The used standards: railways applications

- IEC61373 (Jan 1999) for ground mobile equipments
 - Vibrations and shocks (see details in the concerned Type Test Report)
 - Tests
 - : random vibrations with functional sensor
 - : random vibrations without functional sensor
 - : shocks
 - Vibrations severity : class B

© ABB Entelec - 22 - VS Presentation 1.0
Sep-2005



9 The used standards: railways applications

- EN50124-1
 - Insulation coordination
 - Rated voltage : 1500Vdc (VS50...VS1500)
 - Pollution degree : PD3 (low conductivity and humidity with short term condensation)
 - Insulation distance : OV2 (same as OV1 with higher requirements on over voltages, reliability & disponibility)
 - : 22 mm air distance (reinforced insulation)
 - : material group II ($400 \leq CTI < 600$)
 - Creepage distance : 59 mm (reinforced insulation) with grooves having minimum 1 mm
 - Partial discharges : up to 2.2kV (10pC) following sensor

© ABB Entelec - 23 - VS Presentation 1.0
Sep-2005



9 The used standards: railways applications

■ EN50124-1

■ Insulation coordination

- Rated voltage : 3000Vdc (VS2000...VS4200)
- Pollution degree : PD3 (low conductivity and humidity with short term condensation)
- Insulation distance : OV2 (same as OV1 with higher requirements on over voltages, reliability & disponibility)
: 40 mm air distance (reinforced insulation)
: material group II ($400 \leq CTI < 600$)
- Creepage distance : 118 mm (reinforced insulation) with grooves having minimum 1.5 mm
- Partial discharges : up to 4.3kV (10pC) following sensor

© ABB Entelec - 24 - VS Presentation 1.0
Sep-2005



9 The used standards: railways applications

■ EN50121-3-2 for ground mobile equipments

- Electro-magnetic compatibility (see details in the concerned Type Test Report)
 - Emission : Conducted emission (tab 5)
: Radiated emission (tab 6)

© ABB Entelec - 25 - VS Presentation 1.0
Sep-2005



9 The used standards: railways applications

- EN50121-3-2 for ground mobile equipments
 - Electro-magnetic compatibility (see details in the concerned Type Test Report)
 - Immunity
 - : Electrical fast transients burst
 - : Electrostatic discharge
 - : Conducted perturbations
 - : Radiated electromagnetic fields

© ABB Entelec - 26 - VS Presentation 1.0
Sep-2005



10 The technical documentation

- Technical file
 - Technical presentation: this document
 - Mounting instructions
 - Technical data sheets
 - Type tests report synthesis
 - MTBF calculation
 - Fire/smoke certificate
 - Environmental certificate

© ABB Entelec - 27 - VS Presentation 1.0
Sep-2005





ABB Entrelec

Control Division

10, rue Ampère Z.I. - B.P. 114

F-69685 Chassieu cedex / France

Telephone: +(33) (0) 4 7222 1722

Fax: +(33) (0) 4 7222 1969

<http://www.abb.com/lowvoltage>

E-mail : sensors.sales@fr.abb.com

As part of its on-going product improvement, ABB reserves the right to modify the characteristics of the products described in this document. The information given is not contractual. For further details please contact the Company marketing these products in your country.

Publication
N° 15BC146011C1701
Printed in France (Y 09.2005 L)